


# Marlow DATASHEET®

## PROTEC 500 OUR BEST HEAT RESISTANT ROPE YET!

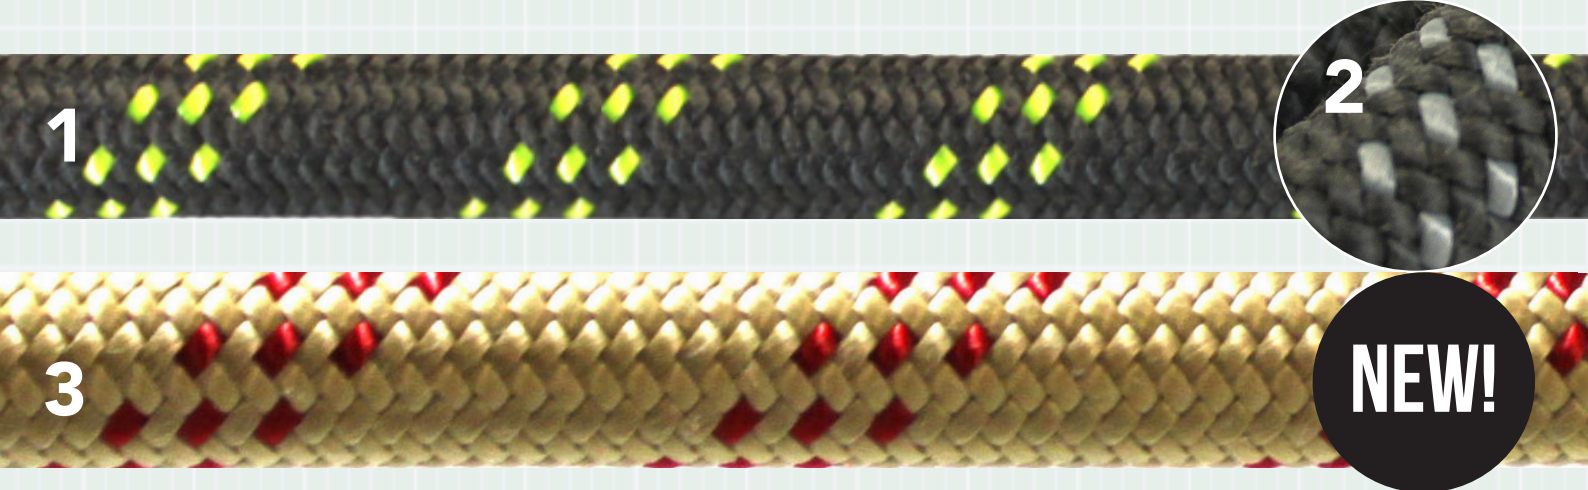

The ProTec 500 is a new CE EN1891 Type A certified 11mm semi static rope with a Technora® cover, essential for all Rope Access professionals who require a work positioning rope with outstanding heat resistant properties. The hi-visibility indicators will melt/fuse if exposed to temperatures over 250°C (482°F), providing visual and tactile evidence of high temperature exposure. Ideal for use around hot pipes and in welding operations.

- 1 - Black with neon hi-visibility markers
- 2 - Black with grey tactical markers
- 3 - Gold with red markers

### ROPE PROPERTIES:

DIAMETER (mm)	WEIGHT (kg/100m)	LENGTH (m)	AV. BREAKLOAD WITH FIG. 8 LOOP (kN)	AV. BREAKLOAD (kN)	TEST STANDARDS	CORE MATERIAL	CORE CONSTRUCTION	COVER CONSTRUCTION
11	8.30	100, 200	24.4	49.1	CE EN1891 Type A	Nylon	Multiple Twisted Nylon	32 Plait Technora®

Marlow Ropes Ltd  
Ropemaker Park  
Hailsham  
East Sussex, BN27 3GU  
England

Marlow Ropes, Inc.  
Cordage Business Park  
Plymouth  
MA 02360  
USA

www.marlowropes.com  
UK: +44 (0) 1323 444 444  
sales@marlowropes.com  
US: +1 508 830 0444  
salesusa@marlowropes.com

#### Disclaimer

Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied.  
Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose.  
Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines.  
Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.



Certification Number 315

ISO 9001